Unpacking Instruction (1):

Cut along the dotted line

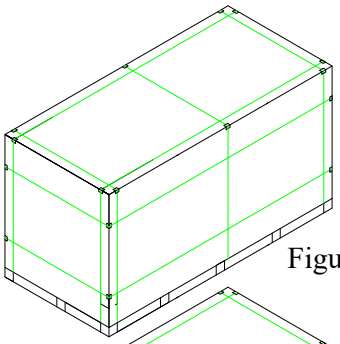


Figure 1

1.Cut off the four packing strips on the short side of the pallet with a scissor and take out the paper fender. As shown in Figure 1.

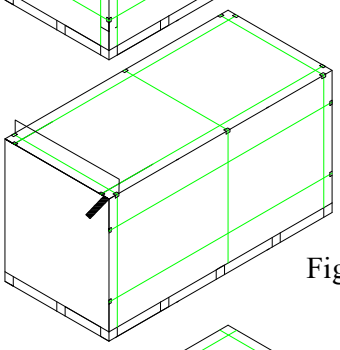


Figure 2

2.Tear the plastic PE film and wrapping film from the short side of cardboard. Open up the roof cover along side creasing line and tear 100-150mm from the long side. Along the vertical dotted line on the one side of cardboard, cut the sides of the cardboard with a knife. As shown in Figure 2.

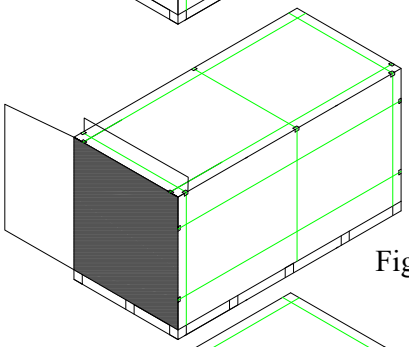


Figure 3

3.Open the side board and cut the four horizontal packing belts inside the box with a scissor. As shown in Figure 3.

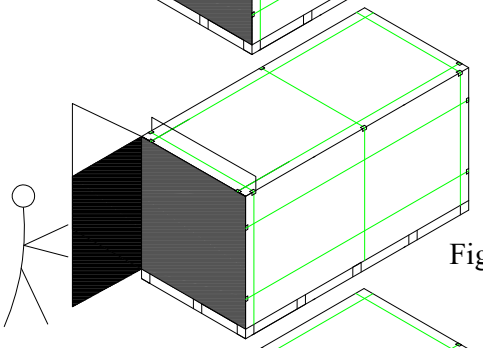


Figure 4

4.After taking away 1 or 2 pieces of modules from the side without the paper fender, gently push the remaining modules to lean against the box body. As shown in Figure 4.

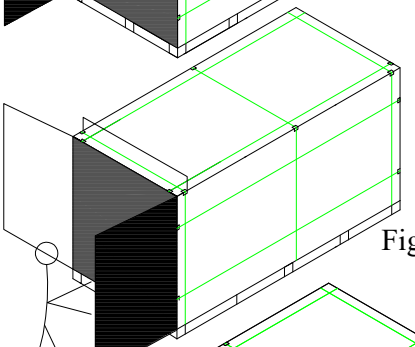


Figure 5

5.Remove the paper fender from the other side and then take away the remaining modules. As shown in Figure 5.

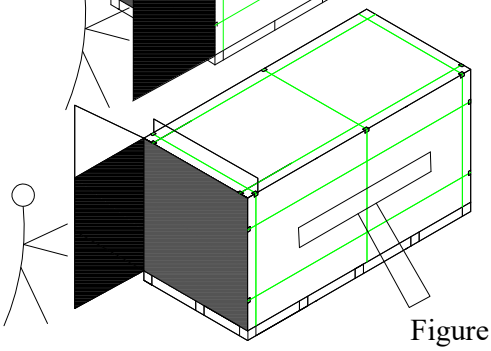


Figure 6

6.The unpacking method should be used when the tilt angle of ground is less or equal to 15°. If you are operating on a non-horizontal ground, tilting prevention would be needed, or refer to the unpacking instruction (2) on the next page. As shown in Figure 6.

Note: If there are any remaining modules after unpacking, It Is necessary to repackage the modules flatwise and prevent dumping.

Unpacking Instruction (2):

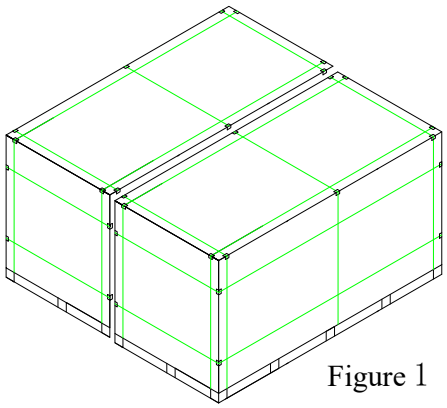


Figure 1

1.The long side of the to be unpacked module pallet need get close to the solid wall, bracket or other unopened module pallet with the same specification and keep a distance of 15 to 20cm. Remove the outer wrapping film, then cut off the outer packing belts with a scissor. As shown in Figure 1.

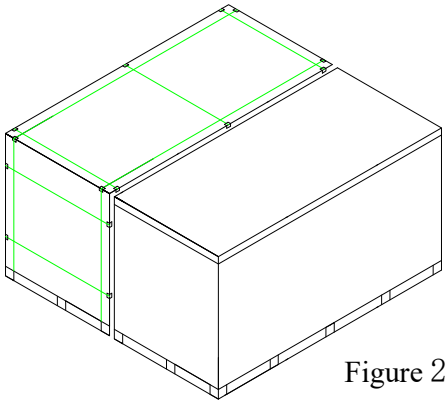


Figure 2

2.Remove the wrapping film, packing belts and protect corner around the box. As shown in Figure 2.

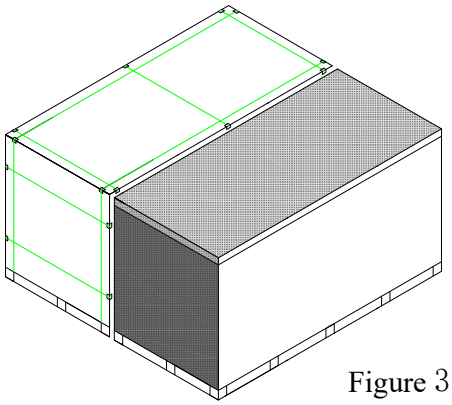


Figure 3

3.Remove the cover and surrounding box. As shown in Figure 3.

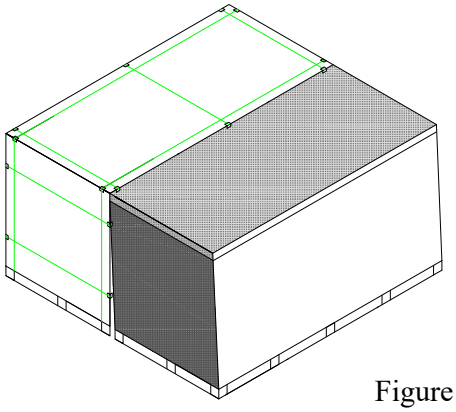


Figure 4

4.Two people hold the modules together to prevent the modules from falling. The third man cut the internal packing belts, remove the corner protectors. The two men who hold the modules gently push the modules and make them lean against a holder, and then remove all the modules in proper order. As shown in Figure 4.

Note: If there are any remaining modules after unpacking, It Is necessary to repackage the modules flatwise and prevent dumping.