

GBC Module with Dual Glass (Preliminary) GK-4-78HGBD

760-780W



High Power



High Efficiency



Anti-fire



Anti-covering



15 Years Product Warranty



30 Years Linear Power Warranty



24.3%

Module Efficiency up to

≤1% First-year Degradation

≤0.35% Annual Degradation



- Operating Temperature

-40°C ~ +85°C
- Power Tolerance

0~+3%
- Junction Box

IP68
- NOCT

45±2°C
- Maximum Series Fuse Rating

30A
- Bifacial Factor


70±5%
- Maximum System Voltage

1500V(IEC)

Mechanical Parameters

Cell Type	GBC
No. of cells	156 (6×26)
Glass	Dual glass, 2.0+2.0mm coated semi tempered glass
Frame	Anodized aluminum
Output Cables	TüV 1×4mm², (+)300mm, (-)200mm or Customized Length
Weight	38.7kg (85.32lbs)
Dimension	2465×1303×33mm
Connector	MC4 Compatible
Packaging	33 pcs per pallet 132 pcs per 20' GP, 264 pcs per 40' HC
Protection Class	Class II
Fire Rating	IEC Class A


Engineering Drawings

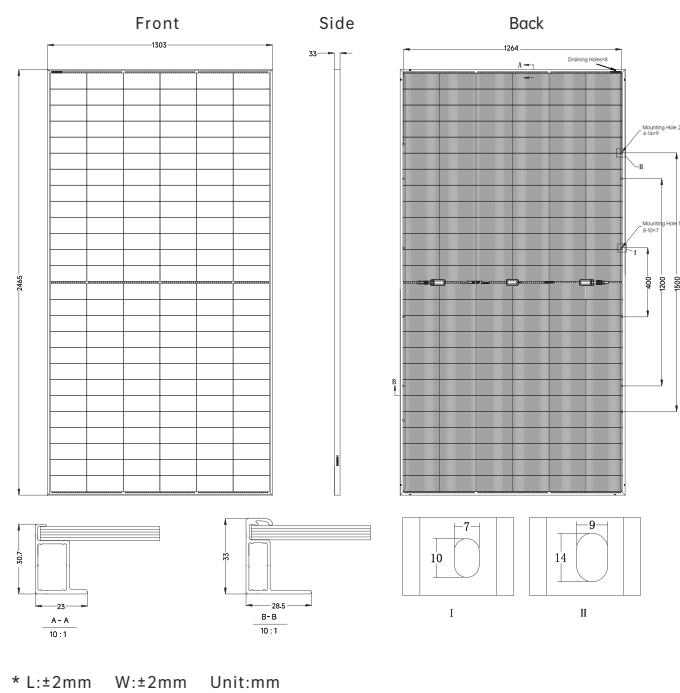

Electrical Characteristics (STC Test)

Module Type	GK-4-78HGBD-760M		GK-4-78HGBD-765M		GK-4-78HGBD-770M		GK-4-78HGBD-775M		GK-4-78HGBD-780M	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	760	576	765	580	770	584	775	588	780	592
Open-circuit Voltage (Voc/V)	58.52	55.49	58.62	55.58	58.72	55.68	58.82	55.77	58.92	55.87
Maximum Power Voltage (Vmp/V)	48.57	46.17	48.67	46.27	48.77	46.36	48.87	46.46	48.87	46.55
Short-circuit Current (Isc/A)	16.50	13.28	16.57	13.34	16.64	13.40	16.71	13.46	16.78	13.53
Maximum Power Current (Imp/A)	15.65	12.48	15.72	12.54	15.79	12.60	15.86	12.65	15.93	12.71
Module Efficiency (%)	23.7		23.8		24.0		24.1		24.3	

1、STC: Irradiance 1000W/M², Cell Temperature25°C, AM=1.5 2、NOCT: Irradiance 800W/M², Ambient Temperature 20°C, AM=1.5, Wind Speed 1M/S

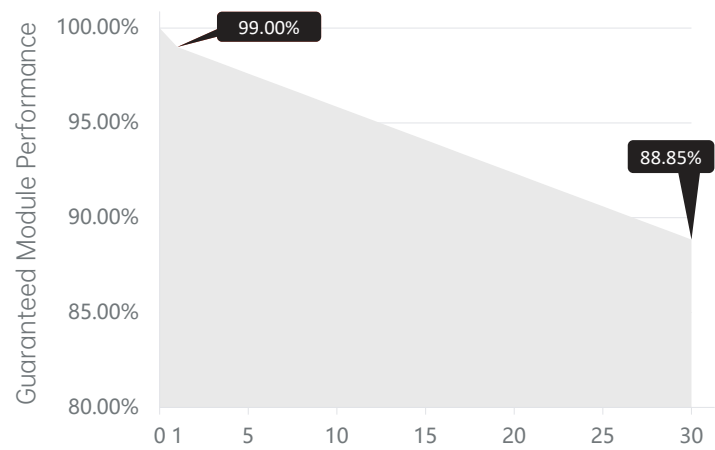

Temperature Ratings (STC)

Temperature Coefficient of Isc	+0.05%/°C
Temperature Coefficient of Voc	-0.22%/°C
Temperature Coefficient of Pmax	-0.26%/°C

Mechanical Loading

Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25 mm diameter hail at 23 m/s



Gokin Solar Co., Ltd.
https://www.gokinsolar.com
gk@gokinsolar.com

Office 1102, No. 58 Huajin Street, Hengqin Free Trade Zone, Zhuhai City, Guangdong Province, China.
Product data is updated as of Nov. 2025. Gokin Solar Co., Ltd. reserves the right to change specifications.